




Exhaust Fan

Vario

Vario exhaust fan are suitable for air extraction directly to the outside. Offering a wide variety of installation possibilities: Single and Double-Glazed Opening Window, Double Opening Window Secondary Glazed, Regular and Thick Wall, Panel, Roof. With cowl for roof application / wind baffle or darkroom.

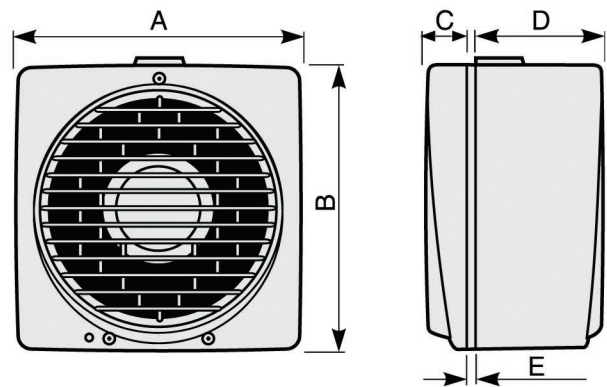

Model	A	B	C	D	E	o Window/Wall
150/6"	215	218	31	97,5	2	185 - 190
230/9"	294	297	31	130	2	257 - 262
300/12"	390	393	31	147	2	324 - 329

Product	Code	V	Hz	W	A	m ³ /h extract (50 Hz)	m ³ /h intake (50 Hz)	rpm/1' extract (50 Hz)	rpm/1' intake (50 Hz)	Lp dB(A) 3m (extract)	Approvals	Kg	IP	Insulation	Max. amb. temp. °C
150/6" AR	12612	220-240	50/60	25	0,11	235	150	1340	2040	37,5		2,07	X4	d. II	50
	12618	127	60	25	0,22	235	140	1300	1760	37,5	-	2,07	X4	d. II	50
230/9" AR	12452	220-240	50/60	26	0,13	480	310	790	1080	35,6		3,45	X4	d. II	50
	12458	127	60	27	0,23	480	310	900	1195	35,6	-	3,45	X4	d. II	50
300/12" AR	12412	220-240	50/60	45	0,21	1050	700	840	1085	40,2		6,13	X4	d. II	50 - 40(60Hz)
	12417	127	60	50	0,40	1050	700	710	900	40,2	-	6,13	X4	d. II	50

*Specifications subject to change without notice
 *Picture illustration may varies with actual products supplied

Marketed by:
Khind Systems (Singapore) Pte Ltd
(formerly known as Ancom Systems (Singapore) Pte Ltd)
 No. 5 Penjuru Close #03-00
 Singapore 608600
 Tel (65) 6862 3777
 Fax (65) 6862 8628
 kssg.sales@khindmistral.com

KHIND
 www.khind-systems.com