

MODEL 370/2

AirVolution^D

The next generation of air movement is here and engineered for maximum performance with peak efficiency. Ideal for ceiling heights as low as 12 feet, the AirVolution-D 370/2 commercial ceiling fan is the perfect airflow solution for cooling your smaller spaces. A sleek design and custom color options add to its appeal, making these fans the most attractive ceiling fans on the market.




STANDARD FEATURES

- Ultra Efficient, PMAC Direct Drive motor
- Revolutionary integrated drive/mount/enclosure system*
- Clearcoat anodized blades
- Forward, reverse, variable speed
- Rated for indoor and outdoor use***
- Capable of Building Automation Integration (with AirLynk upgrade) and fire alarm
- Digital wall controller with fault code access



ILLUSTRATION SHOWN WITH STANDARD DROP LENGTH

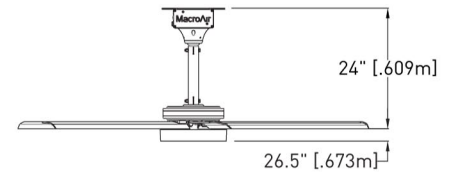

Note: Custom drop lengths greater than 5 ft require guy wires

BASIC SPECIFICATIONS

AIRFOIL DIAMETER	6ft	8ft	10ft	12ft
Airfoil Style	4.5" Extruded Anodized Aluminum Airfoil			
Number of Airfoils	6			
PERFORMANCE				
Max Speed	164 RPM	164 RPM	128 RPM	84 RPM
Recommended Spacing*	28 ft ² [8.5 m ²]	36 ft ² [11 m ²]	40 ft ² [12.2 m ²]	48 ft ² [14.6 m ²]
Max Affected Area	1,400 ft ² [130 m ²]	2,400 ft ² [223 m ²]	3,200 ft ² [297 m ²]	4,000 ft ² [371 m ²]
Sound Level dBA at Max Speed**	45	55	56	48
HANGING REQUIREMENTS				
Hanging Weight	71 lbs [32.21 kg]	79 lbs [35.83 kg]	86 lbs [39.01 kg]	93 lbs [42.18 kg]
Max Torque	4 ft-lb [5 Nm]	13 ft-lb [18 Nm]	20 ft-lb [27 Nm]	19 ft-lb [26 Nm]
Max Thrust in Reverse	2 lbs [0.9 kg]	4 lbs [1.8 kg]	6 lbs [2.7 kg]	7 lbs [3.2 kg]
MOTOR AND DRIVE TRAIN				
Motor Type	Gearless Direct Drive			
Equivalent Horsepower Rating	0.7 HP			
Operating Temp Range	16°F [-10C°] - 122 F° [50C°]			
MAX AMP DRAW / RECOMMENDED FUSE				
110 VAC Single Phase***	5A / 7.5A	8A / 12A	9A / 15A	7A / 10A
208 VAC Single Phase	2.36A / 5A	4A / 7.5A	4.2A / 7.5A	3.4A / 5A
POWER AND CONTROLS				
Power Source Low	Single Phase, 110 to 220 VAC +/-5%			
Control Options	Digital Touchpad, MacroAir Controller 30, AirLynk - BacNet /LonWorks			
INSTALLATION				
Mounting Hardware	Rapid Mount Commercial			
Drop Length	In addition to the standard drop length supplied, optional drop lengths are available in 1ft increments; total drop lengths 5ft and greater require Universal Mounting Hardware with guy wires			
RATINGS AND COMPLIANCE				
Fire and Sprinkler	NFPA Compliant			
Outdoor Rating****	Rated for outdoor use			
Certifications	UL 507 Pending			

*Specifications subject to change without notice

*Picture illustration may varies with actual products supplied