



Aeratron AE3+

This unique 3-blade fan is our best seller and an international multi-award winner for design and efficiency. Rated **MOST EFFICIENT 2013-2018** by Energy Star, the AE3+ furnishes quiet, smooth, and even airflow for a perfect living environment, all year round.




Y 43"

Y 50"

Y 60"

Additional Features

- Silent, optimized 3-D airfoil blades
- Super-efficient DC motor; saves about 85% compared to traditional designs
- Patented self-balancing system and bearing system
- Full-feature remote with 6 speeds, reverse and dimmable light control
- Suitable for indoor or covered outdoor installation up to 40° pitched ceilings (suitably equipped)
- Tropical environment rated

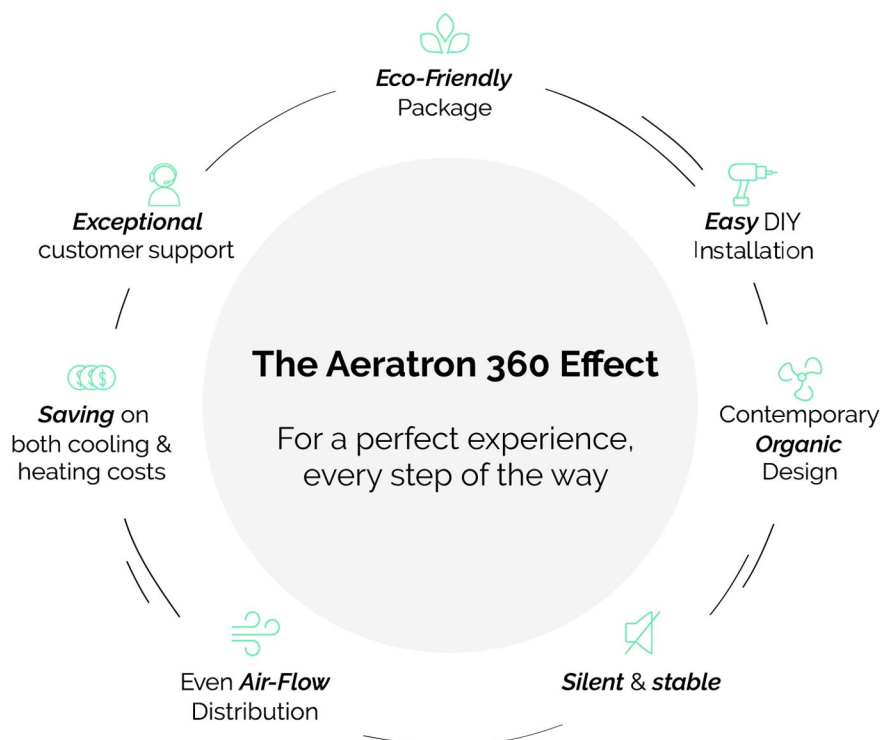

*Specifications subject to change without notice. Picture illustration may varies with actual products supplied

Marketed by:
Khind Systems (Singapore) Pte Ltd
No. 5 Penjuru Close #03-00
Singapore 608600
Tel (65) 6862 3777
Fax (65) 6862 8628
relite.sales@khind.com

KHIND
www.Khind-Systems.com
www.ReliteSpecialty.com

Accessories & Control

- 10W Dimmable LED Warm White 3000K (800 lumens)
- Extension Rod Kit; with included 5.5" Rod (24" & 36" Optional)
- Wall Switch Kit
- Building Automation Kit / 0-10 Volt control module
- WiFi control module

Construction	ABS & Engineering grade Plastic
Weight	14.3lb = 6.5kg
Finishes	Silver - Black - White - Light / Dark Woodgrain
Motor Type	DC - Ultra High Efficiency
Operating Voltage	100 - 240VAC (50-60Hz)
Speeds	1-2-3-4-5-6 + Reverse (Remote Control)
Environmental Rating	Covered Indoor / Outdoor – Tropical
LED Light Kit 3000K	10W – 960 lm – 96 lm/W
Remote Control Function	Fan Speed / Reverse / Light On-Off
Installed Height Hugger	10.9 in. (275mm)
Installed Height Extension Kit	16.6 in. (420mm)
Installed Height (24 in.) Rod	35.9 in. (910mm)
Installed Height (36 in.) Rod	48.5 in. (1230mm)



Fan Diameter	43 in. (1092mm)	50 in. (1260mm)	60 in. (1524mm)
Fan Speed Setting- LOW	1	1	1
Revolutions Per Minutes (RPM)	52	52	52
Power (Watts)	2.9	2.9	3.5
Air Delivery (CFM)	1441	1334	2515
Efficiency (CFM/W)	497	463	718
Fan Speed Setting- MED	3	3	3
Revolutions Per Minutes (RPM)	115	105	102
Power (Watts)	6.1	6.0	9.3
Air Delivery (CFM)	2731	2979	4286
Efficiency (CFM/W)	448	496	460
Fan Speed Setting- HIGH	6	6	6
Revolutions Per Minutes (RPM)	200	164	140
Power (Watts)	16.2	16.4	18.9
Air Delivery (CFM)	3894	4594	5672
Efficiency (CFM/W)	240	280	300

*Specifications subject to change without notice. Picture illustration may varies with actual products supplied

Marketed by:
 Khind Systems (Singapore) Pte Ltd
 No. 5 Penjuru Close #03-00
 Singapore 608600
 Tel (65) 6862 3777
 Fax (65) 6862 8628
 relite.sales@khind.com

KHIND
www.Khind-Systems.com
www.ReliteSpecialty.com

Technical Specifications

Dimensions for Model:

AE2+43" & AE3+43"
AE2+50" & AE3+50"
AE2+60" & AE3+60"

Fan Weight:

AE2+43" = 4.9Kg (10.8lbs)
AE3+43" = 5.5Kg (12.1lbs)
AE2+50" = 5.1Kg (11.2lbs)
AE3+50" = 5.7Kg (12.7lbs)
AE2+60" = 5.6Kg (12.3lbs)
AE3+60" = 6.5Kg (14.3lbs)

Colour Options:


White/Silver/Black
Dark/Light wood-grain

Remote Control:


Hand held, RF

Options:


Wall switch control
Automation control

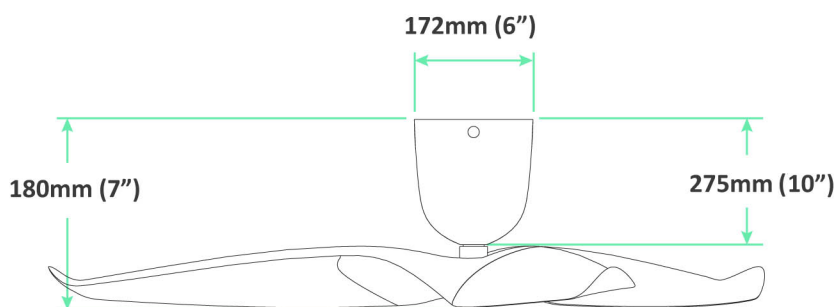

43" 1092mm / 50" 1260mm / 60" 1524mm

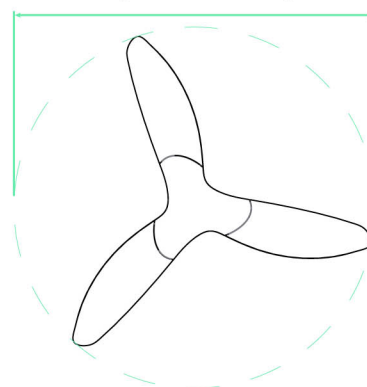


Ceiling Extension Kit

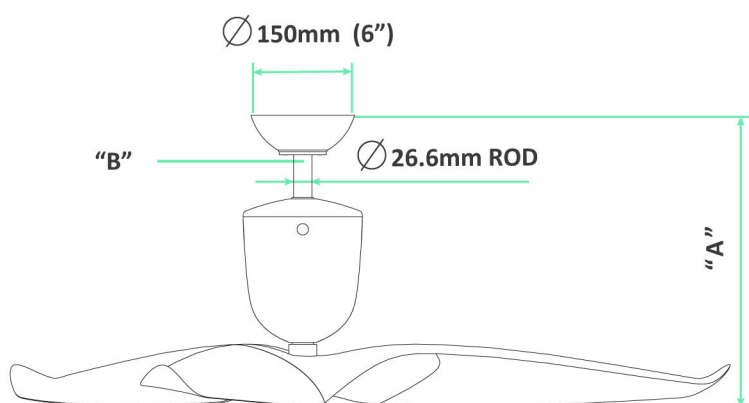

"A" Ceiling to Fan blade	"B" Extension Rod Length	Accessories Required
420mm (16 17/32")	115mm Rod (4 17/32")	Included
910mm (35 53/64")	600mm Rod (23 5/8")	Not Included
1210mm (47 41/64")	900mm Rod (35 7/16")	Not Included

Raked Ceiling Kit

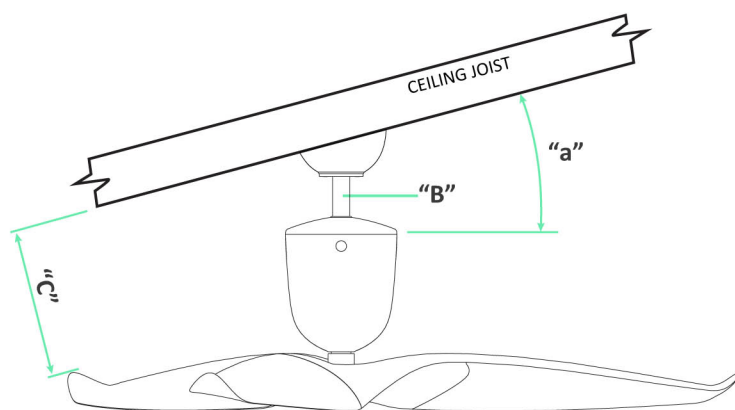

"a" Angle	"C" Clearance	"B" Extension Rod Length	Accessories Required
17° - 33°	200mm min.	115mm Rod (4 17/32")	Included
		600mm Rod (23 5/8")	Not Included
		900mm Rod (35 7/16")	Not Included

*Specifications subject to change without notice. Picture illustration may varies with actual products supplied

Marketed by:

Khind Systems (Singapore) Pte Ltd
No. 5 Penjuru Close #03-00
Singapore 608600
Tel (65) 6862 3777
Fax (65) 6862 8628
relite.sales@khind.com